


WDPR LED OPBOUWARMATUUR

- De LED armaturen zijn voorzien van kwalitatief hoogwaardige LED modules
- Geschikt voor plafondmontage
- Veilig spatwaterdicht armatuur
- Beschermingsklasse **IP66**



Artikel	System Power (W)	Lichtstroom (Lm)	Afmetingen (Mm)	Gewicht (Kg)
AxDxH				
10W /840	10	1300	662x350x111	1,3
12W /840	12	1600	662x350x111	1,3
15W /840	15	2200	662x350x111	1,3
18W /840	18	2600	1272x700x111	1,9
22W /840	22	3200	1272x700x111	1,7
30W /840	30	4400	1272x700x111	1,9
43W /840	43	6400	1272x940x111	1,9
22W /840	22	3250	1572x940x111	2,3
27W /840	27	4000	1572x940x111	2,2
37W /840	37	5500	1572x940x111	2,3
54W /840	54	8000	1572x940x111	2,3
Afscherm mogelijkheden:		Rendement		
- Trans Lucent Opal		87%		

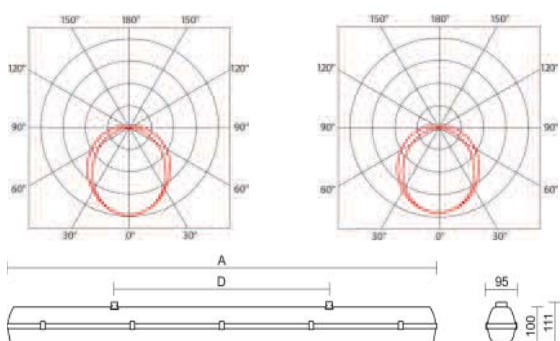

OPTIES:

- Lagere en hogere vermogens in verschillende lengten
- Dim drivers (1-10V / Dali)
- Noodunit
- Clips: roestvrijstaal
- Leverbaar met sensor

